

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 13 TOWNSHIP 17 RANGE 2

DATE: 2-23-99


PARTY CHIEF: Kiste

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 5-75

IN. S.P.C. E ONZE, NAD 83
NAME: 17021306
N: 518657.6860(m)
E: 50912.9520(m)

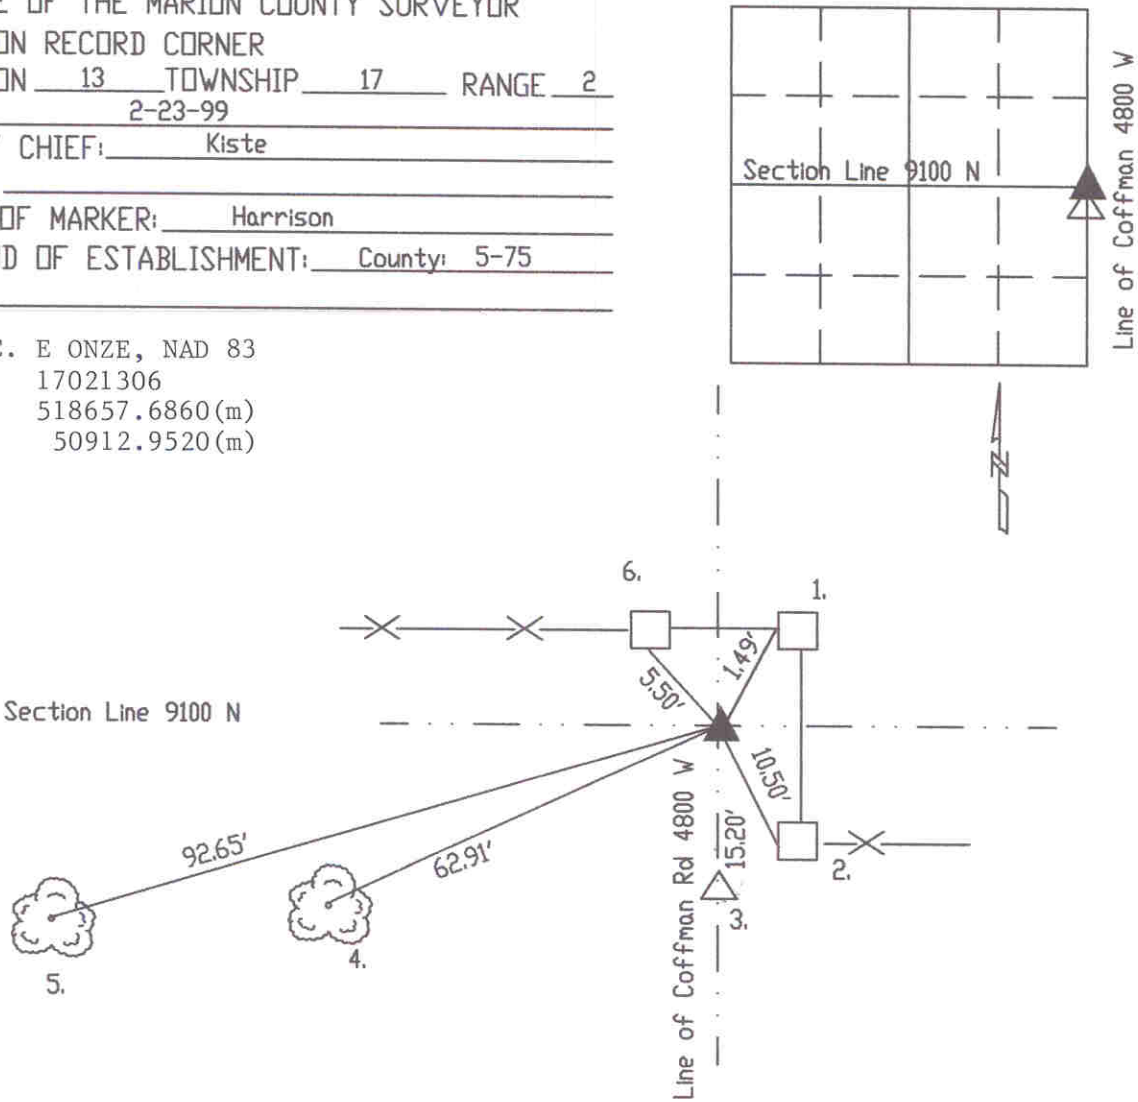

Original post set 1821 by Wm. B. Laughlin with witnesses: 20" white oak S 29 W 10 links, 8" beech S 55 E 11 links per Marion County Atlas pg. 4. Survey by Percy Hosbrook 8-7-1851 indicates a rock set with one witness: green per Pike Township Legal Survey Book pg. 39. Scherschel 8-1975 and called a stone against fence post used by G. Jones Survey for Rock Island. This corner fell on the Rock Island property. When LNG North got the property the entire site was excavated and the stone was destroyed. The corner was reset using Fink, Roberts & Petrie surveys #7343 & #88216C. The location was marked and a Harrison was set by Kiste, 2-23-99.
FOR MORE DETAILS SEE SECTION TRAVERSE NOTES.

HC721306

REF.	DISTANCE	DESCRIPTION
1.	1.49'	Mag nail w/MCS brass washer W corner post
2.	10.50'	Mag nail w/MCS brass washer W corner post
3.	15.20'	Due S to E Q 18-17-3 (Harrison)
4.	62.91'	Boat spike E 12" walnut
5.	92.65'	Boat spike SE 12" oak
6.	5.50'	Mag nail w/MCS brass washer S of fence post